


Stainless Steel 3 Way Hygienic Butt Weld OD Direct Mount Ball Valve

- Butt weld OD ends
- Cavity filled seats
- Direct mount ISO 5211
- Blowout proof stem
- Locking lever
- Suitable for saturated steam up to 10 bar





	Part Description	Material
1	Body	ASTM A351-CF8M
2	Cap	
3	Flat Cap	
4	Ball	ANSI 316
5	Ball Seat A	TFM1600
6	Ball Seat B	
7	Body Seal	PTFE
8	Stem	ANSI 316
9	Thrust Washer	PTFE
10	Packing	
11	Gland Ring	ANSI 304
12	Belleville Washer	
13	Lock Washer	
14	Flat Washer	
15	Stop Pin	
16	Stem Nut	
17	Handle	
18	Handle Sleeve	PVC
19	Spring Washer	ANSI 304
20	Bolt A	
21	Bolt B	

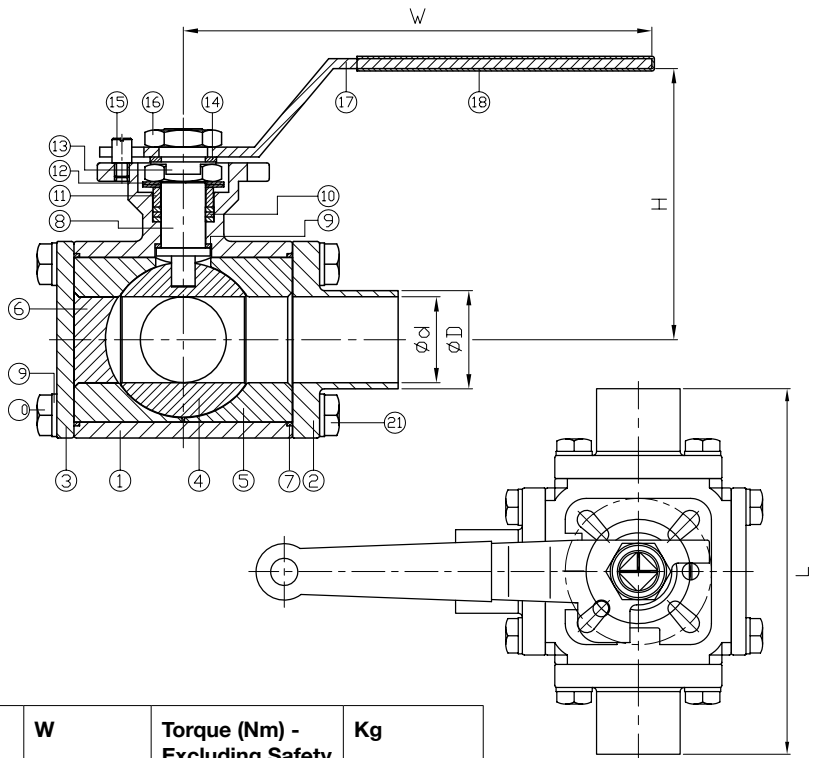

Dimensions

Size	DN	Ød	ØD	L	H	W	Torque (Nm) - Excluding Safety	Kg
1/2"	15	9.40	12.70	118	84	122	9	1.60
1"	25	22.10	25.40	152.40	95.50	137	18	3.10
1.1/2"	40	35	38.10	175	113.50	183	35	5.70
2"	50	47.60	50.80	190	123.50	183	50	9
2.1/2"	65	60	63.50	228	133	370	85	11.20
3"	80	73	76.20	260	162	400	120	20.10
4	100	80	102	289	171.50	400	150	25.50

Stainless Steel 3 Way Hygienic Butt Weld OD Direct Mount Ball Valve

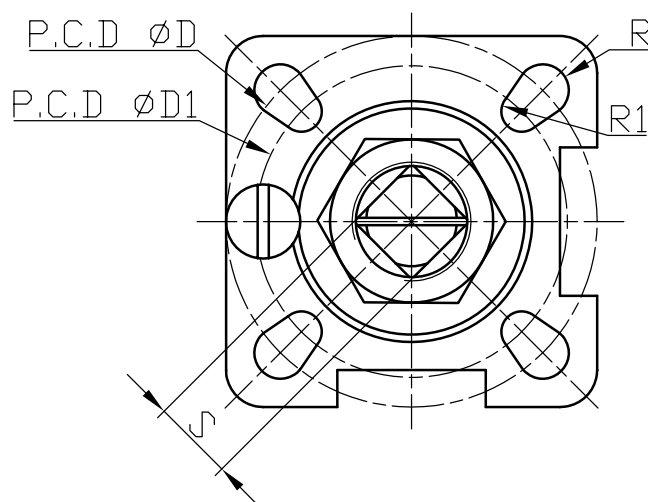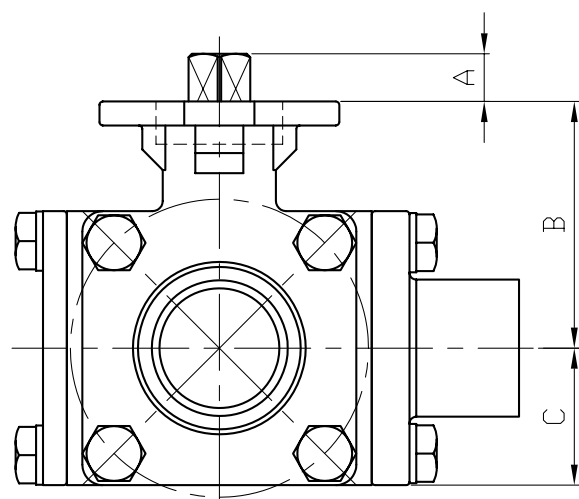

Size	DN	A	B	C	PCD ØD	PCD ØD1	R	R1	S	ISO 5211
1/2"	15	9	44.50	23.50	36	42	2.75	2.75	9	F03/F04
1"	25	11	59	30.50	42	50	3.50	3.50	11	F04/F05
1.1/2"	40	14	72	40	50	70	3.50	4.50	14	F05/F07
2"	50	14	82	50	50	70	3.50	4.50	14	F05/F07
2.1/2"	65	17	100	61	70	102	4.50	6.50	17	F07/F10
3"	80	23	125.50	74	102	125	5.50	6.50	22	F10/F12
4	100	23	135.50	84	102	125	5.50	6.50	22	F10/F12

Stainless Steel 3 Way Hygienic Butt Weld OD Direct Mount Ball Valve

